FRESHGO COLLECTION













COLLECTION: EPESSEC

In a world where freshness of product and convenience is paramount, Cayuga offers the Fresh Go Collection of displays. These are highly flexible cold and hot display merchandisers designed to adapt to a variety of cold and hot food merchandising needs guite easily given their plugand-play feature. A key brand-enhancing element of the Fresh Go Collection is the clip-on exterior panel design. Have it finished your way: either a stain to match your décor, or a marketing signage package highlighting brand details. Extensive research and development is built into these displays, ensuring they function well and are easily maintained ensuring food freshness is safeguarded. Rest assured, these displays use only quality and serviceable components, most North American sourced, which speaks to true sustainability.

"This thing is great! We love the versatility and the fact it can go anywhere in the store. No matter what I put in there, it sells fast!" Merchandising Manager, Major NJ Supermarket

THINGS TO CONSIDER


Showcases are designed to display your refrigerated products at 38-41°F (4-5°C). Showcases are designed to perform correctly when placed in environmental conditions of maximum 75°F (23°C) and 55% relative humidity.

When selecting a showcase and placing it in your store environment, you need to consider the following:

windows

Consider nearby

Consider nearby doorways

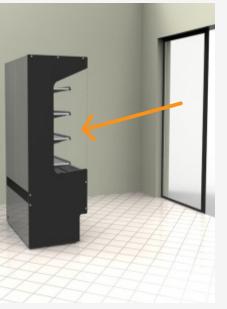

A location near a doorway will affect the airflow and holding temperature of open and closed showcases.



Direct sunlight will affect the holding temperature of open or closed showcases.

Consider nearby vent

sources and fans


HVAC ceiling vents and ceiling fans will affect the airflow of open showcases and could create condensation on the glass of closed showcases.

Ensure your display + is level and plumb



Ensure your showcase is plumb and level to allow for proper drainage of condensation water.



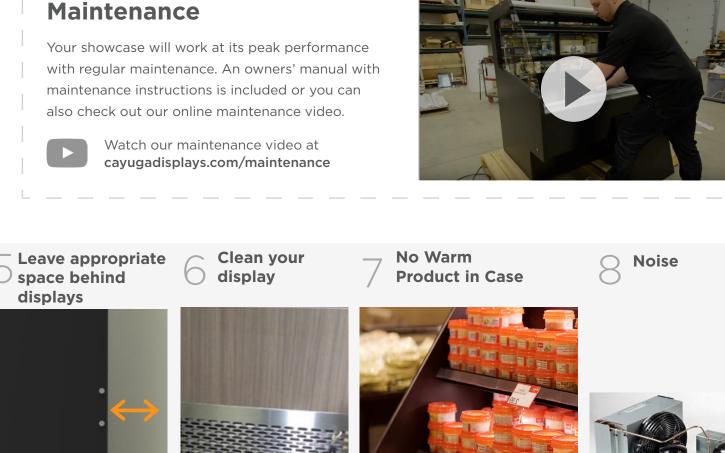



to regularly wipe away dust. Too much dust will not allow the refrigeration to work properly and could result in damage.

Use the included brush Refrigerated displays are designed to KEEP COLD PRODUCT COLD - they are not designed to bring warm product down to a cold temperature. For food safety it is always imperative that warm product be properly chilled (using a blast chiller or cold room) prior to storing in the refrigerated display case.



Self-contained cases have compressor motors and fans and these will make noise, just as your household refrigerator makes noise. Keeping your showcase serviced and clean will help keep the noise level under control.

CRITICAL TEMPERATURE SINGLE POD MOBILE MERCHANDISER

🚝 REFRIGERATED


3' x 3' & 4' x 4' SINGLE POD SIZES, CREATE A UNIQUE REFRIGERATED MOBILE DISPLAY



Shown with natural wood panels



Shown with black laminate panels

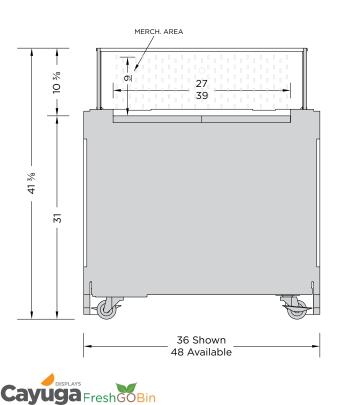

MODEL	DÉCOR PANELS	LENGTH	WIDTH
FGB3-0132-S	D,E	36"	36"
FGB4-0132-S	D,E	48"	48"

FEATURES:

- Display fresh juices, cut fruits, yogurts, deli meats, cheeses, bakery etc.
- Designed to maintain critical product temperature at 38-41°F with a unique 9" high merchandising area
- A mobile display with self-contained refrigeration that plugs into a 115V dedicated circuit and R-513A refrigerant (non-ozone depleting, low-global warming potential)
- A unique attachment system designed to provide the flexibility to incorporate a collection of standard exterior décor panels (Panel E option shown) or customized panels can be created to match your decor or brand image
- The standard décor panels are constructed of natural wood veneers with a variety of stain colours available
- A wide range of laminates, metals and wood finishes to choose from for a customized look
- Protective corners are applied to prevent damage to the décor panels
- Removable black "Ultra-Durable Texture™" powder coated flat base inlays
- Heavy duty casters
- Fresh Go Bins[™] are also available in 2 pod configurations. Specification sheet available

SUGGESTED APPLICATIONS:





FRESH GO Bin™ CRITICAL TEMPERATURE SINGLE POD MOBILE MERCHANDISER

REFRIGERATED

ELECTRICAL SPECS (SELF-CONTAINED)			
MODEL	VOLTS	AMPS	PLUG
FGB3-0132-S	115	10	5-15P
FGB4-0132-S	115	12	5-20P

INTERIOR FINISH	
Brushed Stainless Steel	
Textured Black	
Textured White	

EXTERIOR FINISHES	
Black	
White	
Brushed Stainless Steel	
Painted Metal Standard	
Custom	
Formica laminate finish:	
Other laminate finish (specify):	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to Veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

ADDITIONAL FEATURES:


- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- Hot gas condensate evaporation system
- ETL Listed and Sanitation certified to NSF 7
- 1 Year Parts & Labour Warranty

STANDARD DÉCOR PANELS	
Panel D	
Panel E	
Custom panel option	

MISCELLANEOUS OPTIONS


Dry merchandising shelf & sign pole (optio LED lighting)	nal
Sign pole	

Serrated Inlays



Panel D


Panel E

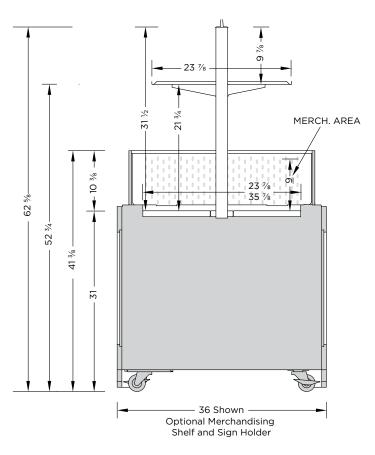

CRITICAL TEMPERATURE 2-POD MERCHANDISER

🔑 REFRIGERATED

3' x 6' 2-POD SIZE, CREATE A UNIQUE REFRIGERATED MOBILE OR STAITONARY DISPLAY

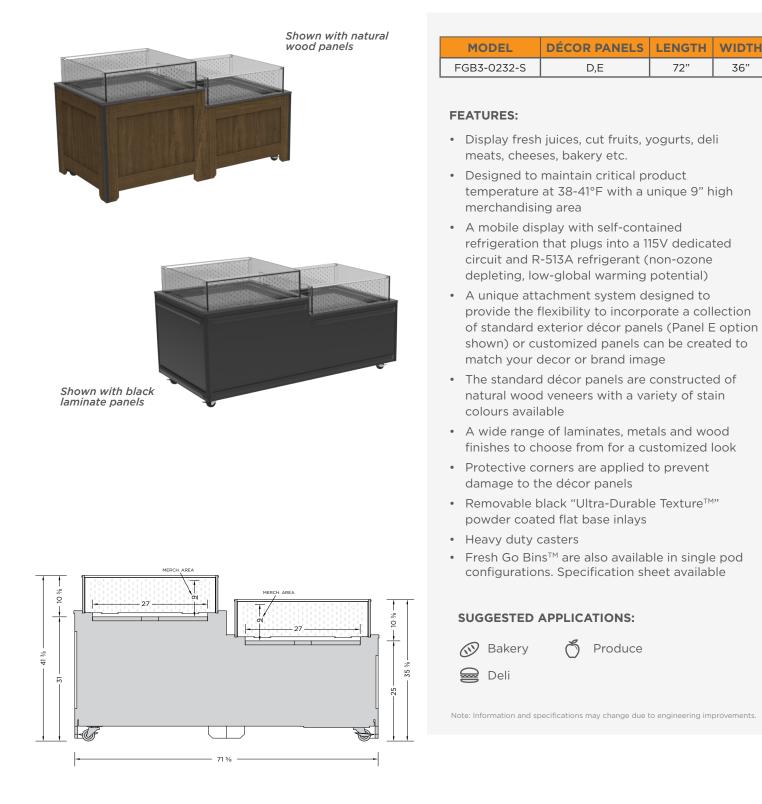



36"



FRESH GO Bin™ **CRITICAL TEMPERATURE 2-POD MERCHANDISER**

ELECTRICAL SPECS (SELF-CONTAINED)			
MODEL	VOLTS	AMPS	PLUG
FGB3-0232-S	115	13.8	5-20P

INTERIOR FINISH	
Brushed Stainless Steel	
Textured Black	
Textured White	

EXTERIOR FINISHES	
Black	
White	
Brushed Stainless Steel	
Painted Metal Standard	
Custom	
Formica laminate finish:	
Other laminate finish (specify):	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to Veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

ADDITIONAL FEATURES:

- Designed to maintain product temperature of 38-41°F with a maximum ambient atmosphere of 75°F/55% humidity
- Hot gas condensate evaporation system
- 1 Year Parts & Labour Warranty


STANDARD DÉCOR PANELS	
Panel D	
Panel E	
Custom panel option	


MISCELLANEOUS OPTIONS
Dry merchandising shelf & sign pole (optional

LED lighting)

Sign pole

Serrated Inlays




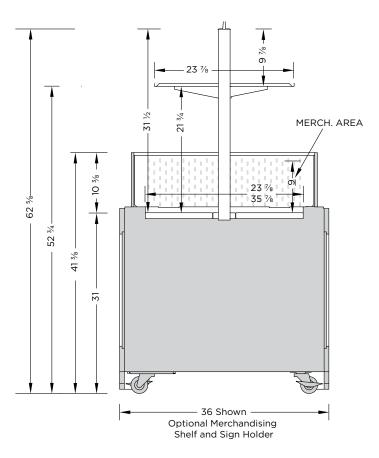

Available Décor Panel Options

FRESHGO BIN ACCESSORIES


DRY MERCHANDISING SHELF & SIGN POLE

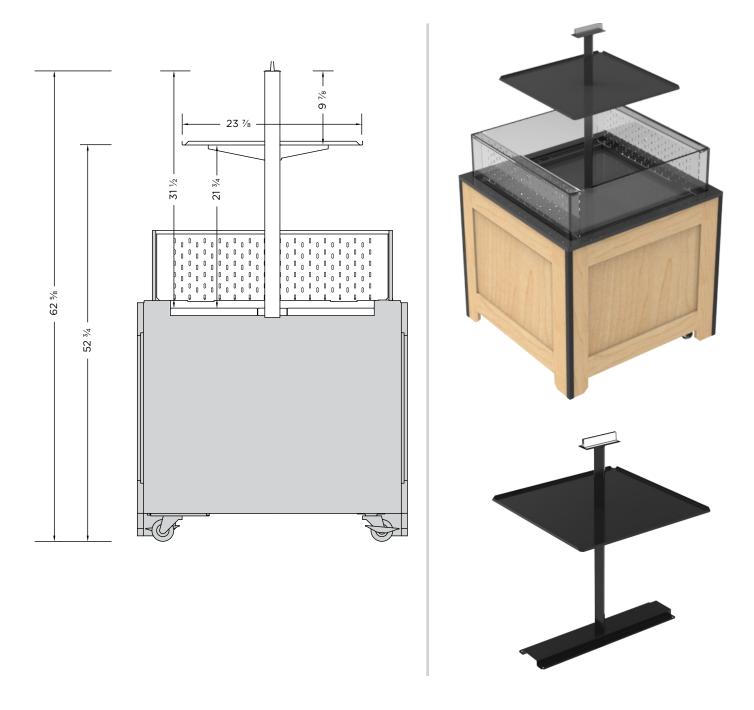


PART #	DESCRIPTION
FGB-022-01	24" x 24" x 31 ½" Dry Merchandising Shelf & Sign Pole
FGB-022-02	24" x 24" x 31 ½" Dry Merchandising Shelf & Sign Pole and LED Lighting



FRESHGO BIN ACCESSORIES

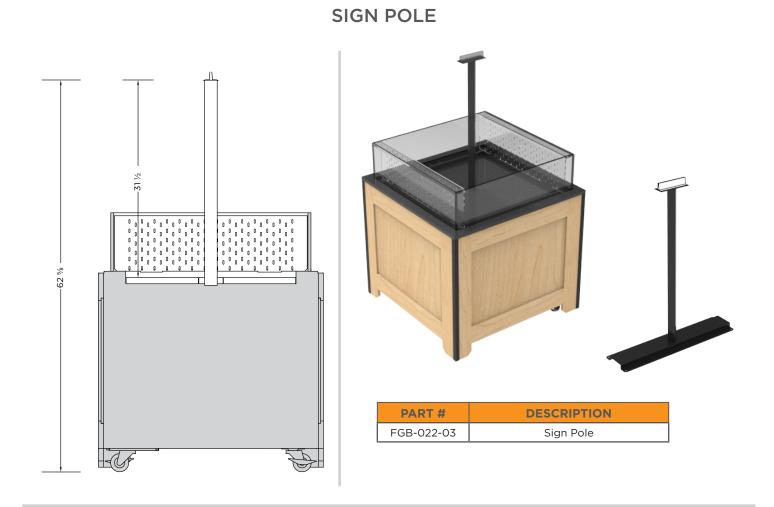

SERRATED INLAY

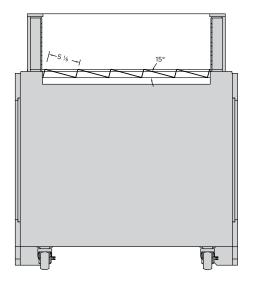






MOBILE SELF-CONTAINED REFRIGERATED FOOD BAR DOUBLE SIDED AIR-OVER DESIGN

🔑 REFRIGERATED

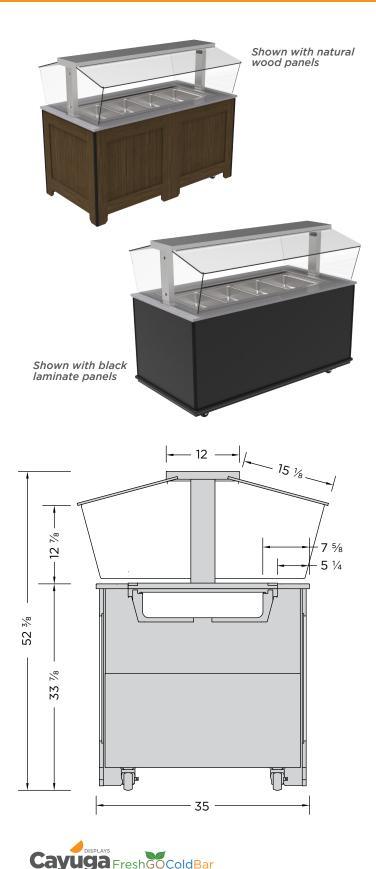

MODEL	WELLS	LENGTH
FBIA-3	3	55 ¼"
FBIA-4	4	68 ¼"
FBIA-5	5	81 ¼"
FBIA-6	6	94 ¼"

FEATURES:

- All metal base cabinet construction
- Exterior finish décor panels are attached using a unique clip-on hardware which allows for easy customization of the display. The décor panels are offered in natural wood, laminate or Stainless Steel materials
- Other custom options are offered. Refer to the options schedule on the next page
- LED lighting strips are mounted in the sneeze guard canopy
- Cayuga Displays proprietary air-over refrigeration system is designed to maximize product freshness and quality
- Stainless Steel removeable drip trays are located below the food bans to catch most spills and debris. A trough in the bottom refrigeration pan catches the secondary spills that the drip trays didn't collect and allows them to be easily wiped up. Condensate water is collected separately and evaporated using a hot gas from the compressor. All air ducts and fan plenum components are easily removeable to ensure that everything is accessible for cleaning
- Full electrical certification. All electrical components ETL/UL certified
- Meets ADA and NSF-7 Standards
- Brush Stainless Steel countertop, refrigerated tub, sneeze guard canopy and top shelf cap
- New R-513A (non-ozone depleting, low global warming potential) refrigerant used in the selfcontained refrigeration system
- The refrigeration system is designed to pull fresh air from a space at the base of the display, eliminating the need for ugly metal side vents attached to the exterior décor panels
- Super E-Coat is applied to the evaporator coils to prevent corrosion form acids, oils and brines

Note: Information and specifications may change due to engineering improvements.




MOBILE SELF-CONTAINED REFRIGERATED FOOD BAR DOUBLE SIDED AIR-OVER DESIGN

REFRIGERATED

ELECTRICAL SPECS				
MODEL	LENGTH	VOLTS	AMPS	PLUG
FBIA-3	55 ¼"	115	11.7	5-15P
FBIA-4	68 ¼"	115	11.7	5-15P
FBIA-5	81 ¼"	115	14.3	5-20P
FBIA-6	94 ¼"	115	14.3	5-20P

STANDARD FEATURES:

- 2 exterior décor panel options: natural wood, and laminated black or white finishes
- Brushed Stainless Steel countertop, refrigerated tub, sneeze guard canopy and top shelf cap
- LED lighting strips are mounted in the sneeze guard canopy
- Cayuga Displays proprietary air-over refrigeration system is designed to maximize product freshness and quality
- Stainless Steel removeable drip trays are located below the food pans to catch most spills and debris. A trough in the bottom refrigeration pan catches the secondary spills allows them to be easily wiped up. Condensate water is collected separately and evaporated using a hot gas from the compressor. All air ducts and fan plenum components are easily removeable to ensure that everything is accessible for cleaning
- New R-513A (non-ozone depleting, low global warming potential) refrigerant used in the selfcontained refrigeration system
- The refrigeration system is designed to pull fresh air from a space at the base of the display, eliminating the need for ugly metal side vents attached to the exterior décor panels.

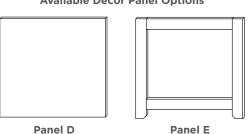

Available Décor Panel Options

CUSTOM OPTIONS:

NATURAL WOOD DÉCOR PANELS	
Panel D	
Panel E	
Custom panel option	

EXTERIOR FINISHES	
Brushed Stainless Steel	
Formica laminate finish:	
Other laminate finish (specify):	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to Veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

MISCELLANEOUS OPTIONS


Metal food container storage shelf installed on the end of the food bar. Painted metal or Brushed Stainless Steel

ADDITIONAL INFORMATION:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only
- Hot gas condensate evaporation system (most units)
- Full electrical certification. All electrical components ETL/UL certified
- Meets ADA and NSF-7 Standards
- 1 year parts and labor warranty

MOBILE HOT FOOD BAR DOUBLE SIDED HOT WELL DESIGN



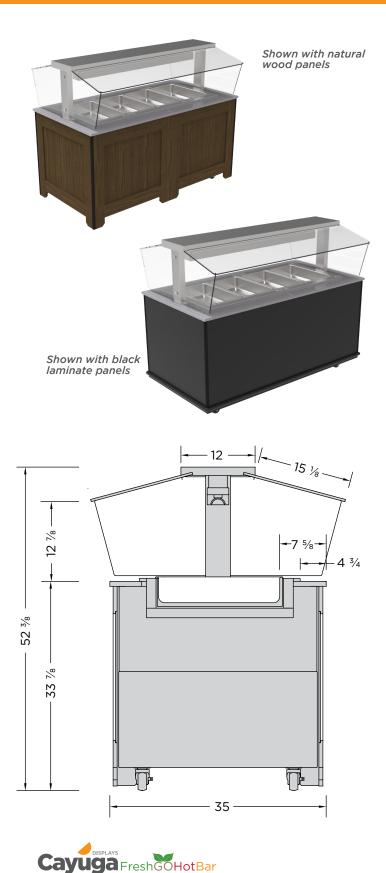

MODEL	WELLS	LENGTH
FBIH-3	3	55 ¼"
FBIH-4	4	68 ¼"
FBIH-5	5	81 ¼"
FBIH-6	6	94 ¼"

FEATURES:

- All metal base cabinet construction
- Exterior finish décor panels are attached using a unique clip-on hardware which allows for easy customization of the display. The décor panels are offered in natural wood, laminate or Stainless Steel materials
- Other custom options are offered. Refer to the options schedule on the next page
- Heat resistant LED lighting strips are mounted in the sneeze guard canopy
- Cayuga Displays proprietary waterless heating technology is designed to maintain the best holding temperatures to ensure product freshness and quality
- Ceramic heat emitters are mounted in the sneeze guard canopy to provide additional infrared heat above each food pan
- The Cayuga Displays waterless heating technology provide better energy efficiency than the conventional steam well system
- Full electrical certification. All electrical components ETL/UL certified
- Meets ADA and NSF-7 Standards
- Brush Stainless Steel countertop, refrigerated tub, sneeze guard canopy and top shelf cap

Note: Information and specifications may change due to engineering improvements.



MOBILE HOT FOOD BAR

DOUBLE SIDED HOT WELL DESIGN


HEATED

ELECTRIC	AL SPECS			
MODEL	LENGTH	VOLTS	AMPS	PLUG
FBIH-3	55 ¼"	230	15	L14-20P
FBIH-4	68 ¼"	230	20	L14-20P
FBIH-5	81 ¼"	230	25	(2) L14-20P
FBIH-6	94 ¼"	230	30	(2) L14-20P

STANDARD FEATURES:

- · 2 exterior décor panel options: natural wood, and laminated black or white finishes
- Brushed Stainless Steel countertop, refrigerated tub, sneeze guard canopy and top shelf cap
- Heat resistant LED lighting strips are mounted in the sneeze guard canopy
- Cayuga Displays proprietary waterless heating technology is designed to maintain the best holding temperatures to ensure product freshness and quality
- Ceramic heat emitters are mounted in the sneeze guard canopy to provide additional infrared heat above each food pan
- The Cayuga Displays waterless heating technology provides better energy efficiency than the conventional steam well system





Panel D

Panel E

CUSTOM OPTIONS:

NATURAL WOOD DÉCOR PANELS	
Panel D	
Panel E	
Custom panel option	

EXTERIOR FINISHES	
Brushed Stainless Steel	
Formica laminate finish:	
Other laminate finish (specify):	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to Veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

MISCELLANEOUS OPTIONS

Metal food container storage shelf installed on the end of the food bar. Painted metal or Brushed Stainless Steel

ADDITIONAL INFORMATION:


- Full electrical certification. All electrical components ETL/UL certified
- Meets ADA and NSF-7 Standards
- 1 year parts and labor warranty

Solid end panels shown





End panels with glass shown

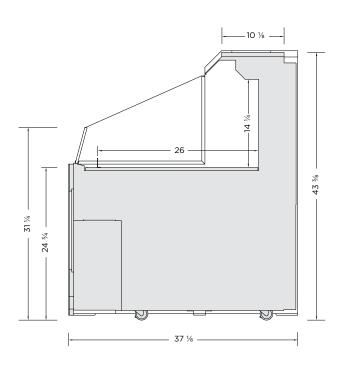

MODEL	LENGTH
FGD-24-42	26 ¼"
FGD-38-42	40 ¼"
FGD-48-42	49 1/8"
FGD-57-42	59 ¾ "
FGD-76-42	78 ½"
FGD-96-42	97 5⁄8"

FEATURES:

- Brushed Stainless steel internal cabinet construction
- Many exterior natural wood finishes available
- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- Other custom options are offered. Refer to the options schedule on the next page
- A LED light strip is mounted on the top ledge of the display area. Various light intensities/spectrums are available
- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity
- ETL electrical certification and NSF-7 standards
- New R-513A (non-ozone depleting, low global warming potential) refrigerant used in the self-contained refrigeration system
- The refrigeration system is designed to pull fresh air from the front base of the display and vent through an integrated rear vent. The unique rear vent allows the display to be backed up against a wall or other displays/ obstructions
- Remote refrigeration available. Contact Cayuga Displays for details

SUGGESTED APPLICATIONS:





REFRIGERATED

TECHNICAL SPECS	5			
MODEL	LENGTH	VOLTS	AMPS	NEMA
FGD-24-42	26 ¼"	115	11.8	5-15P
FGD-38-42	40 ¼"	115	11.9	5-15P
FGD-48-42	49 7⁄8"	115	12.0	5-15P
FGD-57-42	59 ¾ "	115/230	9.3	L14-20P
FGD-76-42	78 ½"	115/230	12.1	L14-20P
FGD-96-42	97 ⁵ ⁄8"	115/230	12.5	L14-20P

STANDARD FEATURES:

- 3 interior finishes options: textured powdercoat black, white and brushed stainless steel
- Standard natural wood exterior panels
- Solid end panels with black or white interior finish
- A LED light strip is mounted on the top ledge of the display area
- The refrigeration system is designed to pull fresh air from the front base of the display and vent through an integrated rear vent. The unique rear vent allows the display to be backed up against a wall or other displays/ obstructions

CUSTOM OPTIONS:

EXTERIOR FINISHES	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

END PANELS

Interior laminate the same as exterior	
Brushed Stainless Steel interior	
Mirrored interior	
Tempered glass end panels	
Mirrored glass panels	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

MISCELLANEOUS OPTIONS	
2 ½" H x 14"D Stepped Riser	
Perforated inlay panel for canted display	
Roll-down thermal night curtain	
Heavy duty lockable casters	
Bolt-on top mounted dry shelving display	

ADDITIONAL INFORMATION:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only
- Hot gas condensate evaporation system (most units)
- ETL listed and Sanitation certified to NSF-7
- 1 year parts and labor warranty



FGD-38-42



FGD-48-42



Finishes: Stain, Danish Walnut



Finishes: Stain, Select Cherry





FGD-76-42














Solid end panels shown





End panels with glass shown

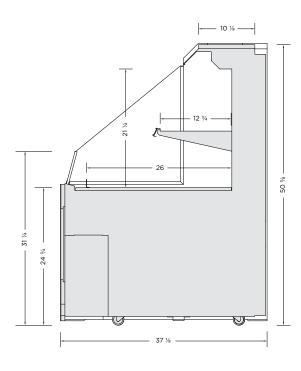


MODEL	LENGTH
FGD-24-49	26 ¼"
FGD-38-49	40 ¼"
FGD-48-49	49 7⁄8"
FGD-57-49	59 ¾ "
FGD-76-49	78 ½"
FGD-96-49	97 5⁄8"

FEATURES:

- Brushed Stainless steel internal cabinet construction
- Many exterior natural wood finishes available
- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- Other custom options are offered. Refer to the options schedule on the next page
- A LED light strip is mounted on the top ledge of the display area. Various light intensities/spectrums are available
- 1-12" adjustable metal shelf with integrated front product stop and LED light strip mounted to the bottom of the shelf
- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity
- ETL electrical certification and NSF-7 standards
- New R-513A (non-ozone depleting, low global warming potential) refrigerant used in the self-contained refrigeration system
- The refrigeration system is designed to pull fresh air from the front base of the display and vent through an integrated rear vent. The unique rear vent allows the display to be backed up against a wall or other displays/obstructions
- Remote refrigeration available. Contact Cayuga Displays for details

SUGGESTED APPLICATIONS:



Note: Information and specifications may change due to engineering improvements.

Cayuga Fresh GO Display

REFRIGERATED

TECHNICAL SPECS	5			
MODEL	LENGTH	VOLTS	AMPS	NEMA
FGD-24-49	26 ¼"	115	11.8	5-15P
FGD-38-49	40 ¼"	115	11.9	5-15P
FGD-48-49	49 7⁄8"	115	12.0	5-15P
FGD-57-49	59 ¾ "	115/230	9.3	L14-20P
FGD-76-49	78 ½"	115/230	12.1	L14-20P
FGD-96-49	97 ⁵ ⁄8"	115/230	12.5	L14-20P

STANDARD FEATURES:

- 3 interior finishes options: textured powdercoat black, white and brushed stainless steel
- Standard natural wood exterior panels
- Solid end panels with black or white interior finish
- A LED light strip is mounted on the top ledge of the display area
- 1-12" adjustable metal shelf with integrated front product stop and LED light strip mounted to the bottom of the shelf
- The refrigeration system is designed to pull fresh air from the front base of the display and vent through an integrated rear vent. The unique rear vent allows the display to be backed up against a wall or other displays/ obstructions

CUSTOM OPTIONS:

EXTERIOR FINISHES	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

END PANELS

Interior laminate the same as exteri	or
Brushed Stainless Steel interior	
Mirrored interior	
Tempered glass end panels	
Mirrored glass panels	
1" black McCue impact bumper stri applied to the front of the display	0
Other McCue impact bumper strip Available upon request	colors

MISCELLANEOUS OPTIONS	
2 ½" H x 14"D Stepped Riser	
Perforated inlay panel for canted display	
Price tag moulding attached to shelf	
Roll-down thermal night curtain	
Heavy duty lockable casters	

ADDITIONAL INFORMATION:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only
- Hot gas condensate evaporation system (most units)
- ETL listed and Sanitation certified to NSF-7
- 1 year parts and labor warranty

Standard features shown

FGD-24-49

Custom option shown



Finishes: Stain, Danish Walnut



FGD-38-49





Finishes: Stain, Weathered Wood

Finishes: Stain, Oiled Cherry

FGD-48-49







Finishes: Stain, Select Cherry



FGD-76-49



FGD-96-49





Finishes: Stain, Weathered Wood




Solid end panels





End panels with glass shown

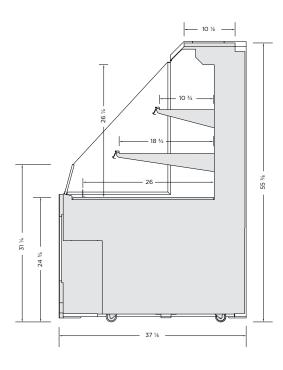


MODEL	LENGTH
FGD-24-54	26 ¼"
FGD-38-54	40 ¼"
FGD-48-54	49 7⁄8"
FGD-57-54	59 ¾ "
FGD-76-54	78 ½"
FGD-96-54	97 5⁄8"

FEATURES:

- Brushed Stainless steel internal cabinet construction
- Many exterior natural wood finishes available
- 3 interior finish options: textured powdercoat black, white and brushed stainless steel
- Other custom options are offered. Refer to the options schedule on the next page
- A LED light strip is mounted on the top ledge of the display area. Various light intensities/spectrums are available
- 1-12" & 1-18" adjustable metal shelves with integrated front product stop and LED light strip mounted to the bottom of the shelves
- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity
- ETL electrical certification and NSF-7 standards
- New R-513A (non-ozone depleting, low global warming potential) refrigerant used in the self-contained refrigeration system
- The refrigeration system is designed to pull fresh air from the front base of the display and vent through an integrated rear vent. The unique rear vent allows the display to be backed up against a wall or other displays/obstructions
- Remote refrigeration available. Contact Cayuga Displays for details

SUGGESTED APPLICATIONS:



Note: Information and specifications may change due to engineering improvements.



TECHNICAL SPECS	5			
MODEL	LENGTH	VOLTS	AMPS	NEMA
FGD-24-54	26 ¼"	115	11.8	5-15P
FGD-38-54	40 ¼"	115	11.9	5-15P
FGD-48-54	49 7⁄8"	115	12.0	5-15P
FGD-57-54	59 ¾ "	115/230	9.8	L14-20P
FGD-76-54	78 ½"	115/230	12.6	L14-20P
FGD-96-54	97 ⁵ ⁄8"	115/230	13.0	L14-20P

STANDARD FEATURES:

- 3 interior finishes options: textured powdercoat black, white and brushed stainless steel
- Standard natural wood exterior panels
- Solid end panels with black or white interior finish
- A LED light strip is mounted on the top ledge of the display area
- 1-12" & 1-18" adjustable metal shelves with integrated front product stop and LED light strip mounted to the bottom of the shelves
- The refrigeration system is designed to pull fresh air from the front base of the display and vent through an integrated rear vent. The unique rear vent allows the display to be backed up against a wall or other displays/ obstructions

CUSTOM OPTIONS:

EXTERIOR FINISHES	
Oak Veneer Plywood	
- Vertical grain direction	
Birch/Maple Veneer Plywood	
- Vertical grain direction	
Clear Finish applied to veneer	
Stain Finish Choice	
1" black McCue impact bumper strip applied to the front of the display	
Other McCue impact bumper strip colors Available upon request	

END PANELS

Interio	or laminate the same as exterior	
Brush	ed Stainless Steel interior	
Mirror	ed interior	
Tempe	ered glass end panels	
Mirror	ed glass panels	
	ck McCue impact bumper strip Ind to the front of the display	
	McCue impact bumper strip colors ble upon request	

MISCELLANEOUS OPTIONS	
2 ½" H x 14"D Stepped Riser	
Perforated inlay panel for canted display	
Price tag moulding attached to shelf	
Roll-down thermal night curtain	
Heavy duty lockable casters	

ADDITIONAL INFORMATION:

- Designed to maintain the critical temperature of the products within the display at a range of 38-41°F (3-5°C) with an ambient atmosphere of 75°F (24°C)/55% humidity. Designed for holding pre-chilled product only
- Hot gas condensate evaporation system (most units)
- ETL listed and Sanitation certified to NSF-7
- 1 year parts and labor warranty

Standard features shown

FGD-24-54

Custom option shown



Finishes: Stain, Danish Walnut



Finishes: Stain, Oiled Cherry

FGD-38-54





Finishes: Stain, Weathered Wood

FGD-48-54







Finishes: Stain, Select Cherry



FGD-76-54









Finishes: Stain, Weathered Wood







Formica[®] Laminate

Formica Group provides surfaces that fuse beautiful design with purposeful functionality. Formica^{*} Products provide versatile surfacing solutions that are inspired by and adapt to the way people live, work and play.

Formica[®] Brand Laminate offers a broader range of looks than ever before. Transform spaces with our modern laminates that are as beautiful as they are durable. Mix and match solids, patterns and finishes.


Product Features:

- Postforming
- Durable and Wear-resistant
- Horizontal and Vertical
- Impact Resistant

Formica[®] EliteForm

Our innovative Formica^{*} EliteForm surfacing technology redefines the performance attributes of high pressure laminate to deliver a more durable laminate for today's market. Formica^{*} Laminate with EliteForm features superior scratch resistance over other laminate brands, the ability to postform to a smaller radius with better blister resistance, and more durable, long-lasting surfaces, including the Gloss texture in horizontal applications. EliteForm comes standard on all Formica^{*} Laminates, at no additional cost.

Price Group One: All Colours are matte (-58) finish

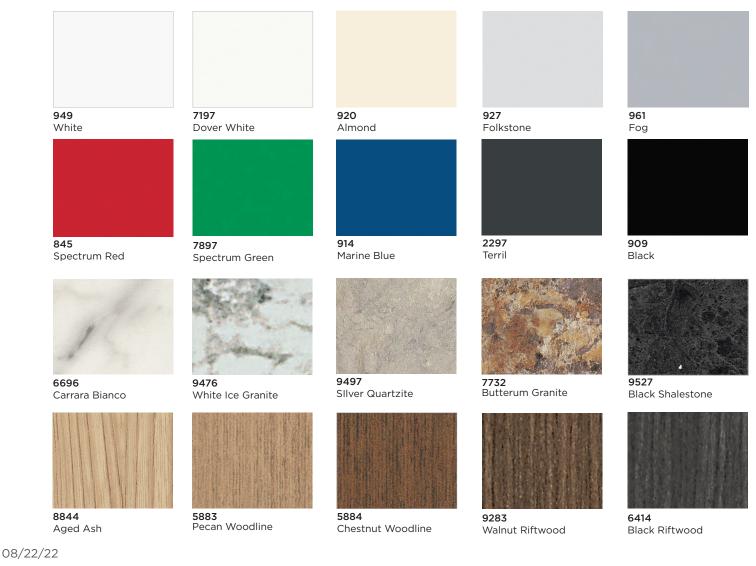

Price Group Two: All Colours are matte finish





Formica Canada Inc. is located in St-jean-sur-Richelieu, Quebec, and employs more than 250 people.

Formica Canada is proud to be part of the Well Made Here local purchasing program.

As the inventor of high pressure laminate, Formica Corporation has always worked to provide innovative, high quality products. Efficient use of resources is at our core, and we have taken many steps to improve our environmental footprint - from reusing the water in our presses to incorporating recycled materials into our surfacing products. We are committed to a long-term planning horizon that includes becoming an industry-leading environmental steward.



For larger laminate sample, please visit: cayugadisplays.com 1-800-839-5536 formica.com 1-800-FORMICA[™]

WOOD STAINS

WOOD GRAINS



*Refer to physical swatches for a true representation of colors, above images may appear slightly different than actual samples. *

PAINTED METAL

CAYUGA STOCK COLOURS



Cayuga black and white colours come in a textured finish.

Matte finish is available upon request.

Cayuga Black

Cayuga White

RAL STOCK COLOURS



- Standard products in stock
- RAL Program colours not listed are also available upon request
- Non-RAL Program colours have long lead times and could affect deliver date

HOW TO ORDER

We'll help you select the right case for your requirements. The steps below will help us to serve you best.

- Choose the showcase that meets your displays requirements from the product specification sheets.
- 2 Review the options table found on the specification sheet and make your selections of the options provided.
- 3 Select from the large pallet of colours found on the last five pages of the brochure, or choose a stainless steel, standard black or white for the exterior finish of your showcase.
- E-mail your request for a quote to your Cayuga sales representative or sales@cayugadisplays.com and we will quickly respond to your request. Please include your full contact information in case we have any questions.


Contact the inside sales team

Cayuga Displays

E: sales@cayugadisplays.comT: 1-800-839-5536F: 1-905-772-3179



T: 800.839.5536 F: 905.772.3179
E: sales@cayugadisplays.com
A: 88 Talbot St E, PO Box 130 Cayuga, ON NOA 1E0



Published 08/09/23